

Raw Material Ultra High Molecular Weight Polyethylene (UHMWPE)


General Properties	Test Method	Unit	Value
Density	DIN EN ISO 1183	g/cm ³	0.93
Water Absorption In air 50% r.h.	DIN 53715	%	0
Absorption 23-C In Water-Saturation	DIN 53495	%	0.02
Food Compliance	-	FDA/BfR	YES
UV Stability	-	-	YES
Mechanical Properties			
Tensile Stress At Yield At Break	DIN 53455	N/mm ²	-
Elongation At Break	DIN 53453	%	-
Tensile Modulus Of Elasticity	DIN 53456	N/mm ²	700
Impact Strength Charpy 7.5 J	DIN 53453	KJ/mm ²	No Break
Wear Resistance	-	%	~ 80
Ball Indentation Hardness	DIN 53453	N/mm ²	34
Shore Hardness (D)	DIN 53456	Scale D	60
Coefficient Of Friction (Dynamic)	-	μ	0.1
Thermal Properties			
Melting Temperature	ISO 3146	°C	135
Thermal Conductivity	DIN 52612	W/km	0.40
Deformation Temperature HDT	DIN 53461	°C	-
Coefficient Of Linear Thermal Expansion	DIN 53752	10 ⁻⁶ K ⁻¹	-
Service Temperature, Long Term	Average	°C	80
Service Temperature, Short Term (MAX)	Average	°C	90
Minimum Operating Temperature	Average	°C	-200
Flammability	UL 94 (3-6mm thickness)	-	HB
Electrical Properties			
Dielectric Constant At 1 MHz	DIN 53483	-	3
Dielectric Dissipation Factor (1 MHz)	DIN 53483	-	0.001
Volume Resistivity	DIN 53482	Ωcm	10 ¹²
Dielectric Strength	DIN 53481	KV/mm	45

Applications:

- Flow Promotion Liners
- Wear Profiles
- Conveyor Components & Rollers
- Scrolls
- Skating Rink Surfaces

Characteristics:

- Extremely Light Weight & Tough
- Excellent Wear Resistance
- Good Chemical Resistance
- Low Co-efficient Of Friction
- Impact Proof

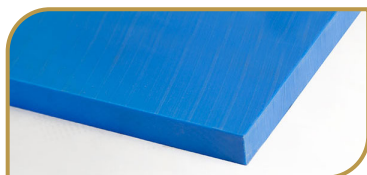

All information contained in this literature corresponds with our current knowledge of the products. Tynic Automation assume no liability whatsoever in respect of application, conversion or use made of the aforementioned information or products, or any consequence thereof. The buyer undertakes all liability in respect of the application, conversion or use of the aforementioned information or products. Existing intellectual property rights must be observed and Tynic Automation reserve the right to make technical alterations.